



Features

- » Extremely Wideband >20GHz
- » High Dynamic Range
- » Customization Available
- » Fully Integrated Module
- » Complete Link Option

Applications

- » Replaces Coax Cable
- » Radio Over Fiber
- » Radio Astronomy
- » Remote Antenna Sites
- » Phased Array Radar
- » EW/ECM
- » Optical Delay Lines
- » SATCOM

PHOTONIC SYSTEMS INC.

900 Middlesex Turnpike
Building 5
Billerica, MA 01821
USA

Phone: 978-670-4990
Fax: 978-670-2510
psi.sales@photonicsinc.com
www.photonicsinc.com

Description


The PSI-1601-20UR is a high performance microwave photonic receiver providing wideband optical to electrical (O/E) conversion for RF signals up to and beyond 20 GHz. Along with a PSI-1600-20UT transmitter module, the PSI-1600-20UR provides a complete fiber optic link solution designed to replace low loss coaxial cable or microwave repeaters for applications in military systems, satellite communications, radio astronomy, optical delay lines, cellular/wireless base stations or other RF/Microwave related systems. Part of the PSI-1600-20L series of RF over fiber links, the PSI-1600-20UR receiver does not include any RF post-amplification.

Custom RF performance, packaging, connectors and link gain configurations are available. **Please contact PSI with your application needs.**

RF Link Performance

Parameter	Condition	Min	Typ	Max	Units
Operating Frequency		0.1		20	GHz
Nominal Link Gain	@ 10 GHz	- 35	-32		dB
Noise Figure	@ 10 GHz		47	50	dB
Input IP3	@ 10 GHz	20	23		dBm
Spur Free Dynamic Range	1 Hz band @ 10 GHz	98	100		dB/Hz ^{2/3}
Gain Flatness	1-20 GHz			±2	dB
	Any 100 MHz band			±0.5	dB

Note: RF link specifications with PSI-1600-20UT transmitter module and a 3m jumper.

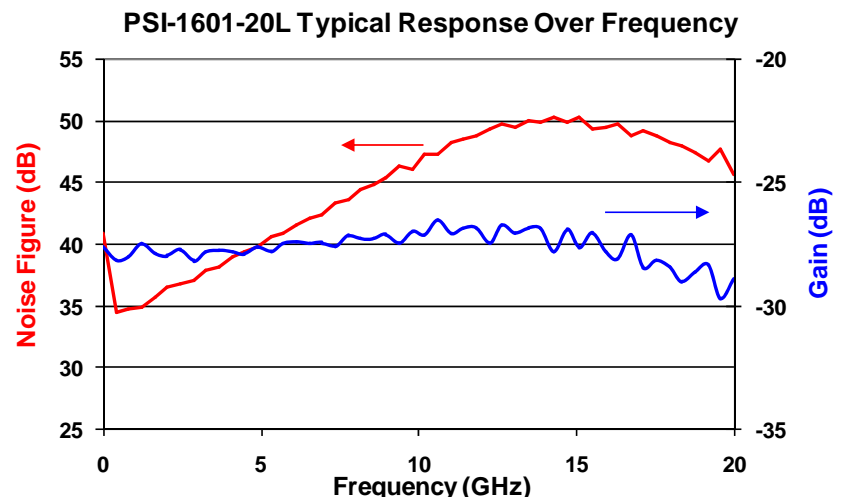

RF Characteristics

Parameter	Condition	Min	Typ	Max	Units
Frequency Range		0.045		20	GHz
RF Output Impedance			50		Ω
RF Return Loss		9.5	15		dB
RF Output Connector		SMA Female			

Optical Characteristics

Parameter	Condition	Min	Typ	Max	Units
Wavelength		1300		1600	nm
Optical Input Power				10	dBm
Responsivity	@ DC	0.7	0.85		A/W
Optical Output Connector	FC/APC Standard, please contact PSI for other options				

Note: The user supplied fiber optic cable should be singlemode Corning SMF-28 or equivalent. In order to minimize distortion caused by optical reflections the optical cable return loss should be >55 dB (angled-


Environmental Characteristics

Parameter	Condition	Min	Typ	Max	Units
Operating Temperature	Within Specifications	-20		70	$^{\circ}\text{C}$
Storage Temperature	No damage	-40		85	$^{\circ}\text{C}$
Humidity	Non-condensing	0		95	%

DC Power and D-Connector

Pin	Description
1	+12 V _{DC} @ 15mA max.
2	Ground
3	NC
4	Ground
5	NC
6	NC
7	Ground
8	Ground
9	NC

Mechanical Dimensions

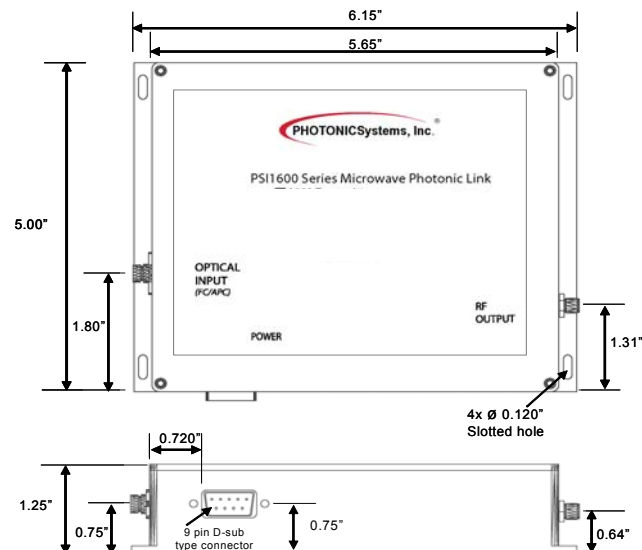

Ordering Information

PSI Part Number	Description
PSI-1600-20UR	O/E Receiver Module
PSI-1601-20L	RF Photonic Link Includes (PSI-1600-20UT and PSI-1600-20UR)
PSI-1602-20L	RF Photonic Link Includes (PSI-1600-20AT and PSI-1600-20UR)

Rev. 9-12